
COLUMN COMPONENTS AND TUBING



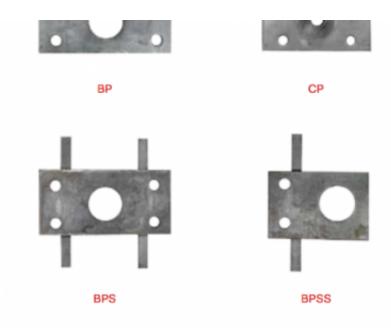

PRINT FRIENDLY PDF

EXTEND-O-COLUMNS

3" DIAMETER ROUND | 11 GAUGE 3-1/2" DIAMETER ROUND | 11 GAUGE 4" DIAMETER ROUND | 11 GAUGE 3-1/2" DIAMETER ROUND | .216 WALL

FIXED LENGTH COLUMNS

3" DIAMETER ROUND | 11 GAUGE 3-1/2" DIAMETER ROUND | 11 GAUGE 4" DIAMETER ROUND | 11 GAUGE 3-1/2" DIAMETER ROUND | .216 WALL

Permanent Screw Assembly (CP Plate Attached To Screw)					
Model	Size	Adjustment	Maximum Load*		
PA3	3" O.D. Tube	4"	18,700#		
PA35	3-1/2" O.D. Tube	4"	23,800		
PA4	4" O.D. Tube	4"	28,900		
PA35216	3-1/2" O.D. x .216 Wall	4"	41,500		
PA35P	3 1/2" Sch 40 Pipe, 4" O.D.	4"	60,078		
PA4P	4" Sch 40 Pipe, 4 1/2" O.D.	4"	60,078		

Turning Bar Included with Each Assembly

*All Screw Assemblies must be encased in minimum 3,500 psi concrete; installed head first, with collar nut buried.

Column Plates		
Model	Dimensions	
ВР	4" x 8" x 1/4" - 2" Center Hole	
BPS	4" x 8" x 1/4" – 2" Center Hole w/ Straps	
BPSS	4" x 5-3/4" x 1/4" – 2" Center Hole	
СР	3-1/2" x 6" x 1/4" - 5/8" Center Hole	
PS	1/8" x 8" x 5/8" Straps (2) Welded to Above B Plate.	
ТВ	3/8" x 7" Turning Bar	
Shipped: Loose		

- BP: Top plate for adjustable columns; top and bottom for fixed columns
- BPS: BP with straps
- BPSS: Shorter length fits corners of partition walls
- CP: Used with permanent assembly
- Plates have full bearing on all common beam flanges
- •Holes provided for bolt or lag-screw attachment to beam

11 Gauge Tubing A500 Grade B (Items Not Shown)				
Model	Size	Length		
T324	3" O.D.	24'		
T3524	3-1/2" O.D.	24'		
T424	4" O.D.	24'		

.216 Wall Tubing A500 Grade B (Item Not Shown)				
Model	Size	Length		
T3524216	3-1/2" O.D.	24'		

IMPORTANT

Not responsible for the installation, alteration, or modification of any completed product, or the usage of any component in the fabrication of any product beyond our control.